

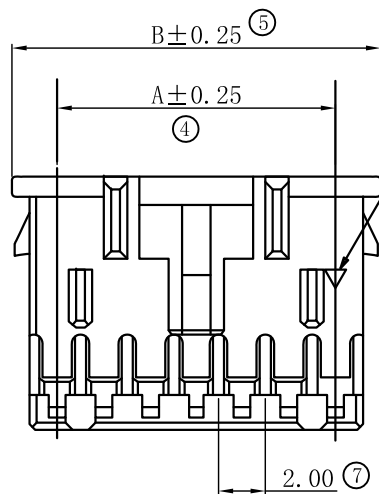


(14 circuits or less)



Circuit No. 1 mark

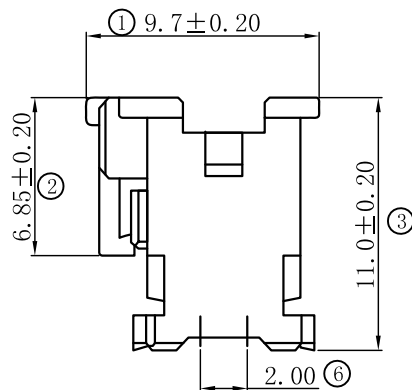


SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C



HOUSING

- Material: PA66 UL94V-0

(16 circuits or more)

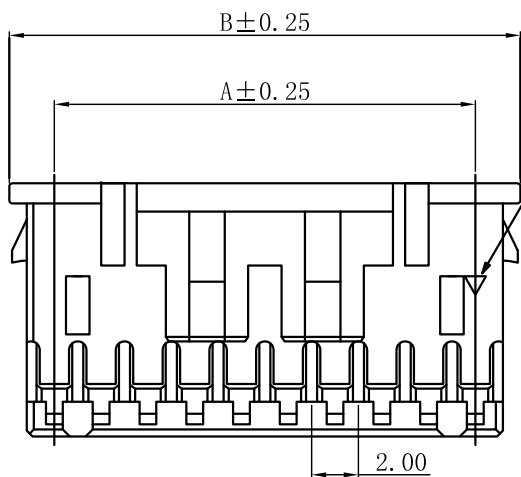

Circuit No. 1 mark

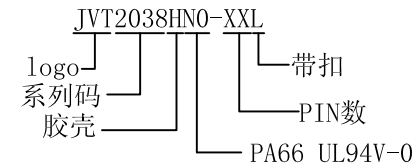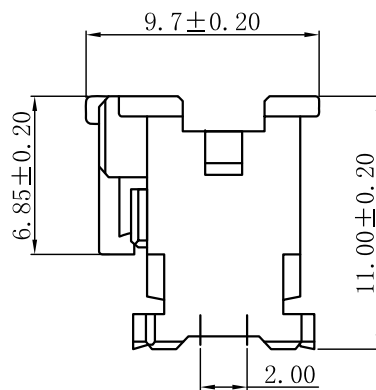

Poles	DIM	
	A	B
10	8.00	12.0
12	10.00	14.0
14	12.00	16.0
16	14.00	18.0
18	16.00	20.0
20	18.00	22.0
22	20.00	24.0
24	22.00	26.0
26	24.00	28.0
28	26.00	30.0
30	28.00	32.0
32	30.00	34.0

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

版本	变更内容	日期	单位	mm	比例	1:1	日期	20140304
----	------	----	----	----	----	-----	----	----------



核准	审核	绘图	品名	PAD 2.0mm HSG 带扣		
	bolly	李勇军	料号	JVT2038HNO-XXL		
			图名	031	版本	A